

A M P Y E M A I L M E T E R I N G

Large Domestic Light Commercial

**MODEL
1010**

**Ideal for Upgrading
Domestic Services**

FEATURES INCLUDE

BK-G6 Module

**Capacity 10m³/h (Gas)
at 125 Pascal Loss**

Low Pressure Drop

**Powder coated
aluminium case**

Pulse Ready

**Magnetically Driven,
All Weather,
Sealed Index**

**Designed to
EN1359 & AG702**



MODEL 1010


 Email Metering

MODEL 1010

Large Domestic, Light Commercial

General Details

The Model 1010 is designed for large domestic or light commercial applications. Utilising the compact BK-G6 module it provides a designed capacity of 10 m³/h of natural gas at 125 Pa pressure drop (Natural Gas specific gravity 0.62).

Construction

The Model 1010 is designed for extreme weather conditions having a fully sealed hydrophilic coated UV stabilised index, die cast aluminium housing which is Alodine surface pre-treated followed by baked Woodland Grey polyester powder coat.

Easy Installation

The meters inlet / outlet bosses and external dimensions are identical to that of the Model 750. While delivering an increased flow channel performance via the BK-G6 module the Model 1010 meter weighs just 100 grams (100g) more than the Model 750. This allows domestic gas services to be upgraded to a higher flow capacity without the need to alter the pipe-work at the meter, saving time and money.

Accuracy

The outstanding design features of the Model 1010 gas meter such as the tangent control, large cyclic capacity and magnetic drive index provide unparalleled accuracy. Our calibration and test facilities are accredited to ISO/IEC 17025.

Accuracy Retention

The initial accuracy of a meter is easy to achieve by using calibration to pass initial testing. However, sustained accuracy over time comes down to the quality, design and construction of the meter. The Model 1010 has been designed for long-term stability and extended field life.

SPECIFICATIONS*

Gases

Natural gas, town gas, propane, butane, LPG and inert gases. For other gases please consult AMPY Email Metering.

Working Pressure

Refer to meter index badge.

Temperature Range

-10 °C to +65 °C.

Cyclic Capacity

0.002 cubic metres (2 litres).

Index drive

Magnetically driven index ensuring low mechanical wear.

Index

Anti -Fog hydrophilic coated 8 digit index 5 whole cubic meters (white numbers on black wheels) and 3 decimal places (white numbers on red wheels).

Threads

Meter boss threads vertical inlet/outlet 10 Light 1" to BS746 1987 at 152mm (6") centres. 1" 10 Lt. to 3/4" BSP Cap Nut and Liner set available (part number SK5).

Case Construction

Pressure die cast aluminium.

Pulse Output Ready

All meters are fitted with a magnet in the first index wheel and hence each meter is easily pulse retro fittable in the field 1 pulse / 10 lts.

Corrosion Protection

Alodine internal and external pre-treatment of castings followed by baked Woodland Grey polyester powder coat for maximum corrosion protection.

Pulse Output Module


10 litres per pulse using IN-Z61 or IN-Z62 pulse module.

Endurance Testing

Endurance testing to the most stringent world requirements has been conducted on the Model 1010 demonstrating long term accuracy retention.

The Model 1010 meter exceeds the endurance testing requirements of the European Standard EN1359:1999, American National Standard ANSI B109.1, Australian Gas Association AG702, and OMIL Recommendation 31.

Model 1010 Typical Accuracy Curve

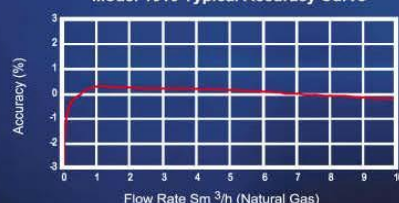

Weight: 2.75 kg

Colour: Woodland Grey



Australia

Sydney +61 2 9690 7409

Melbourne +61 3 8368 1600

Brisbane +61 7 3265 4344

Perth +61 8 9244 3523

Customer Service Toll Free

Australia 1800 337 957

New Zealand

Auckland +64 9 579 1155

International

Sales Enquires +61 3 8368 1600

sales@ampymetering.com.au

www.ampymetering.com

Emwest Products Pty Limited
trading as AMPY Email Metering
ABN 78 002 894 224

*Continuing product improvement is AMPY Email Metering policy, specifications are subject to change without notice.